

Höhenverstellung / Rail de guidage  
 230 V~

210 mm

42 mm

A

$\phi 10 \text{ mm}$

74 mm

T = 379 mm

10 mm

300 mm

530 mm

370 mm

1910 mm

2220 mm

1210 mm

1220 mm

1010 mm

unteres  
 Fixierloch  
 trou de fixation  
 vers le bas  
 250 mm


F = UP/ENC

30 mm

F


variabel

2190 mm / 230V ~ + ⚡



Wichtig:  
 siehe Montagerihenfolge  
 1-9

Important:  
 voir la séquence de montage  
 1-9

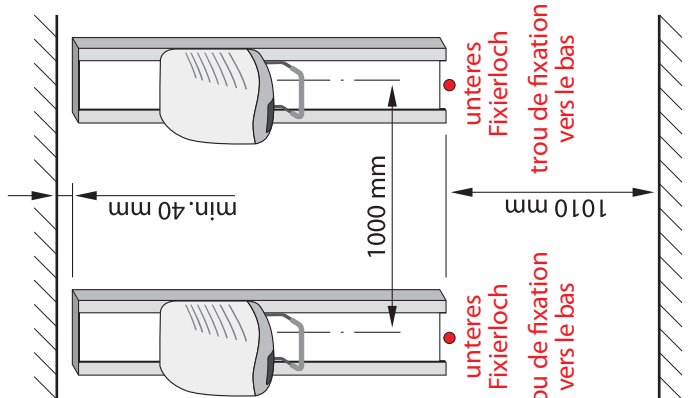

1210 mm